



C-Leg Table Assembly Instructions

937620-INST
Rev. A


- 1.** Lay the table top upside down on a non-scratching surface. Move the table frame into position and align the holes in the frame to the pilot holes in the top. (NOTE: Adjustable height frame shown. Your product may not include adjustable legs.)

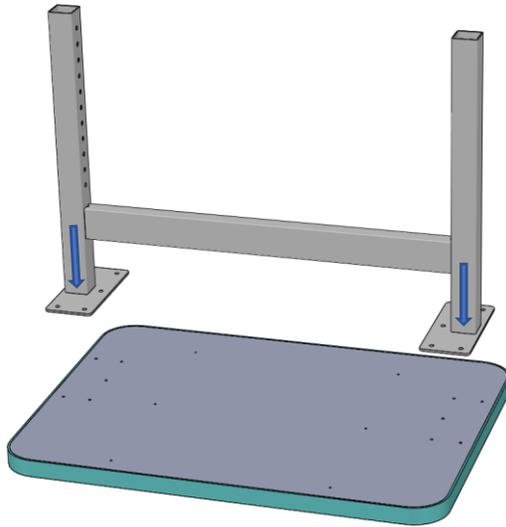


- 2.** Install (5) #10 x .875" screws through the plate and into the table top on each side. Tighten to a torque of 30-35 in-lb.

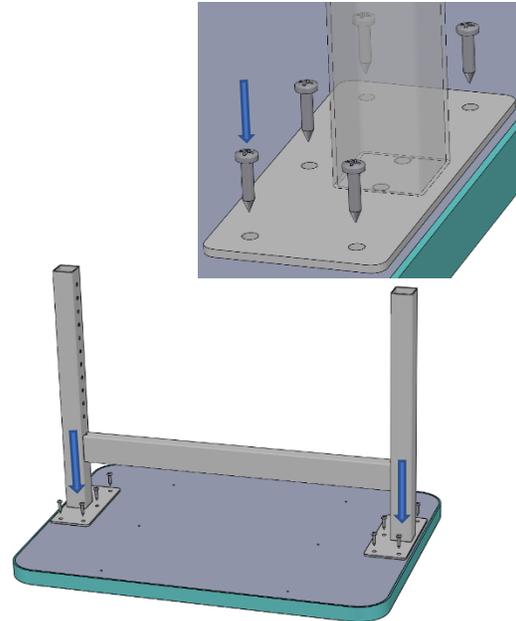

- 3.** For tables with adjustable legs: Insert the lower legs with the long section toward the front and set the height with (2) ¼-20 x 0.750" allen screws per leg. Tighten the bolts to a torque of 50-60 in-lb.

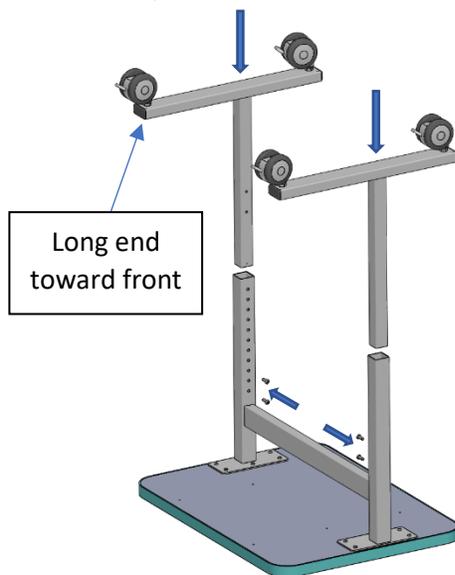

- 4.** Carefully flip the table upright onto the feet.

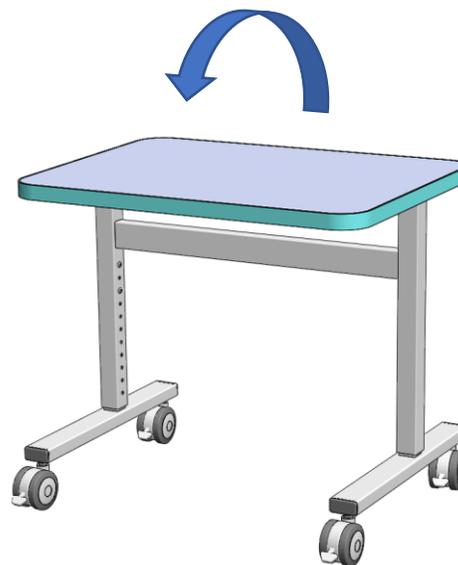

For questions please call us at (616) 396-1142