



H-Frame Instruction Sheet

H-Frame-INST
Rev. A


- 1.** Insert lower legs with threaded holes pointing towards the middle of the frame.

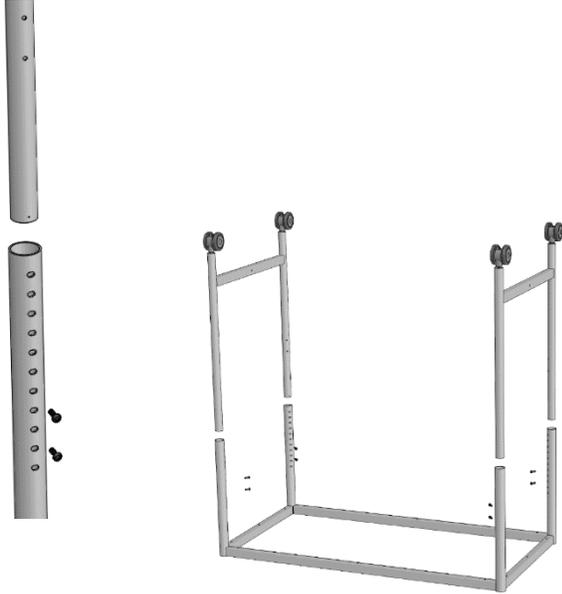


- 2.** Set each pair of legs to the desired height and fix in place by installing (8) ¼"-20 X .75" screws (2 per leg). Tighten to a torque of 50-60 in-lbs.

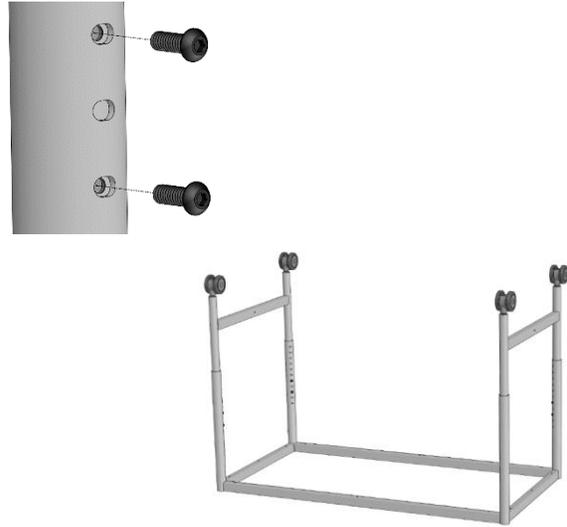

- 3.** After legs are set to desired height, move center tube into position and align with the holes in the lower rails.

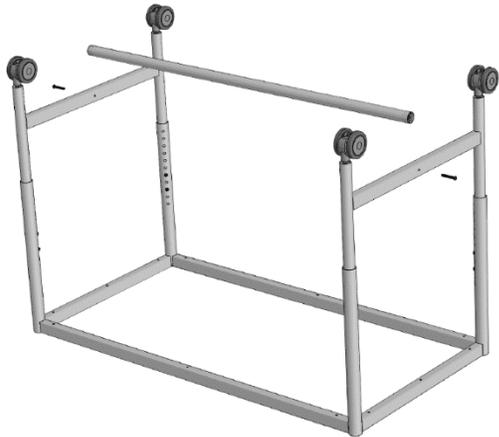

- 4.** Fasten center tube in place with (2) ¼"-20 X 1.75" screws. Tighten to a torque of 50-60 in-lbs. These screws must be loosened when making further adjustments to the table height.

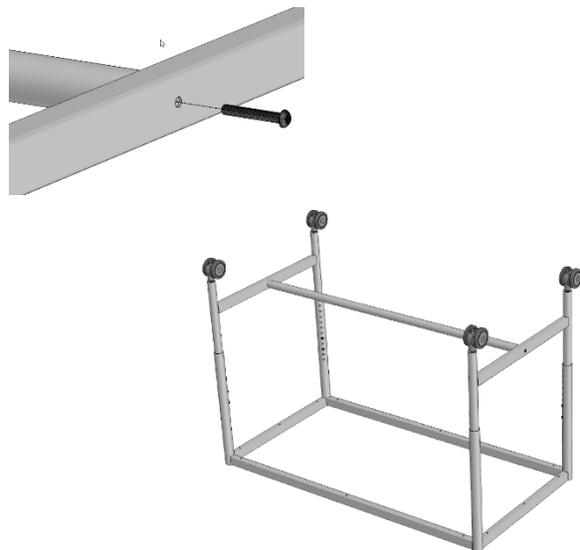

For questions please call us at (616) 396-1142